

Datasheet



ZEB PAN011

600x600 UGR22 LED
Panel, 30W, 120lm/W,
SDCM <5, CRI80, L80B10
50 000h



LED panel 600x600, 30W, 120lm/W, UGR22, CRI80. Reliable (L80B10 at 50,000h) and precise (SDCM <3). Ideal for tertiary corridors and commercial premises. Recessed or surface-mounted (ACC015 frame optional). Pre-wired looping terminal included.

Power
Factor
<0,9

120
lm/W

L80B10
50 000h

RG0

Fast
Connector

Power	30W
Efficiency	120 lm/W
CCT	4000K
Beam	110°
Dimming	ON/OFF
UGR	22
CRI	80
IP	IP20
IK	IK02
SDCM	<5


General information

Sizing (L x l x H mm)	595*595*32mm	Product colour	White
Cutout sizing	585*585mm	Emitting surface material	PS+SPCC
Mounting type	Recessed	Driver	ON/OFF Included
Application	Indoor	Electrical class	Class II
Luminous Flux	3600lm	Dimmable	No
Housing material	SPCC	Glow-wire test	700°
Tiltable	White	Replaceable light source	No
Operating temp.	-20C° - +40C°	Weight	1250g

Complementary data

Connection type	Fast connector	Line Frequency (HZ)	50hz
Rated Input Voltage (V)	220-240V	Inrush Current (A)	15A
Rated Current (A)	0,15	Photobiological Risk	RG0
Power Factor	>0,9	Flickering index (PstLM)	<1
THD	☒20%	Stroboscopic effect (SVM)	<0,4
		Luminous flux tolerance	10%

Dimensional Drawing (mm)

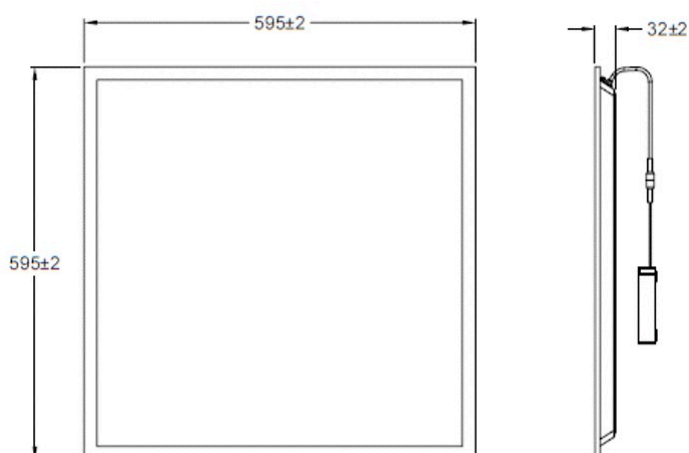

Light Distribution

