

Technical data sheet

Cable gland, EX area, metric thread, black

Item number: 2050366



Cable gland with EU design type approval certificate for products and protection systems for use in accordance with the regulations in explosion-hazard area. Directive 2014/34/EU.

EU design type approval certificate number: BK123ATEX0030 X.

With metric connecting thread to IEC 423.

Sealing ring of chloroprene/nitrile rubber, moulded sealing, so no connection thread sealing ring needed.

Protection IP 68 at 3 bar.



PA Polyamide

Master data

Item number	2050366
Type	VTEC EX M40 SW
Description 1	Cable gland, EX area
Manufacturer	OBO
Dimension	M40
Colour	Black
Material	Polyamide
Smallest sales unit	10
Unit of quantity	Piece
Weight	7.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,3243 kg CO2e / 1 Piece


Technical data sheet

Cable gland, EX area, metric thread, black

Item number: 2050366



Dimensions

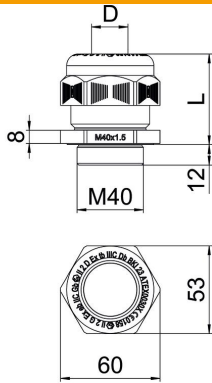

Dimension E	60 mm
Dimension G	M40 mm
Dimension L max.	54 mm
Dimension L min.	39 mm
Dimension L1	13 mm
Dimension L2	8 mm

Technical data

Type of seal	Sealing ring
Version for	Straight
Bend protection	no
Sealing area D, max.	32 mm
Sealing area D, min.	25 mm
explosion-proof	yes
Flat cable gland	no
For Ex zone	yes
For Ex zone gas	1, 2
For Ex zone dust	21, 22
Thread	M40 x 1,5
Thread type	Metric
Thread length	13 mm
Nominal thread size	40
Thread increase	1.5 mm
Fibre-glass reinforced	no
Halogen-free	yes
Unstable torque	15 Nm
Sealing insert, multiple	no
With locknut	no
Impact-resistant	no
WAF	53
Protection rating	IP68
Hexagonal corner dimension	60 mm
Splittable gland	no
Permitted temperature range, max.	65 °C
Permitted temperature range, min.	-20 °C
Strain relief option	no